

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE REQUEST FOR FILING NATIONAL PATENT APPLICATION

Under 35 USC 111(a) and Rule 53(b)

PATENT APPLICATION

WITH SIGNED DECLARATION

NONPROVISIONAL
NON REISSUE
NON PCT NAT PHASE

Commissioner of Patents
Washington, D.C. 20231

Sir:

Herewith is the PATENT APPLICATION of
Inventor(s): HADA, Satoshi et al

Atty. Dkt.: PM 265165

U3-9941-YK

M#

Client Ref

Title GAS CONCENTRATION MEASURING APPARATUS
DESIGNED TO MINIMIZE ERROR COMPONENT
CONTAINED IN OUTPUT

including:

Date: December 3, 1999

1. Specification: 31 pages (only spec. and claims)
2. ☐ Specification in non-English language
3. Declaration ☒ Original ☐ Facsimile/Copy ☒ Abstract 1 page(s); 13 numbered claims
4. ☒ Drawings: 10 sheet(s) ☐ informal; ☒ formal of size: ☒ A4 ☐ 11"
5. ☐ See top first page re prior Provisional, National or International application(s). ("X" box only if info is there and do not complete corresponding item 6 or 7). (Prior M# _____ SN _____)
6. **AMEND the specification** please by inserting before the first line: -- This is a ☐ Continuation-in-Part ☐ Divisional ☐ Continuation ☐ Substitute Application (MPEP 201.09) of:
6(a) ☐ National Appln. No. _____ / _____ filed _____ (M# _____)
6(b) ☐ International Appln. No. _____ filed _____
7. ☐ **AMEND the specification** by inserting before the first line: -- This application claims the benefit of U.S. Provisional Application No. 60/ _____, filed _____.
8. ☒ Attached is an assignment and cover sheet. Please return the recorded assignment to the undersigned.
9. ☐ Prior application is assigned to _____

by Assignment recorded _____ Reel _____ Frame _____

10. **FOREIGN** priority is claimed under 35 USC 119(a)-(d)/365(b) based on filing in JAPAN

11. _____ (country)

Application No.	Filing Date	Application No.	Filing Date
(1) 10-345654	December 4, 1998	(2)	
(3)		(4)	
(5)		(6)	
(7)		(8)	
(9)		(10)	

12. 1 (No.) Certified copy (copies): ☒ attached; ☐ previously filed (date) _____
in U.S. Application No. _____ / _____ filed on _____

13. ☐ Attached: _____ (No.) Verified Statement(s) establishing "small entity" status under Rules 9 & 27.
14. **DOMESTIC/INTERNATIONAL** priority is claimed under 35 USC 119(e)/120/365(c) based on the following provisional, nonprovisional and/or PCT international application(s):

Application No.	Filing Date	Application No.	Filing Date
(1)		(4)	
(2)		(5)	
(3)		(6)	

15. ☐ This application is being filed under Rule 53(b)(2) since an inventor is named in the enclosed Declaration who was not named in the prior application.
16. ☒ Attached: Form PTO-1449 listing the enclosed documents
17. ☐ Preliminary Amendment:

THE FOLLOWING FILING FEE IS BASED ON CLAIMS AS FILED LESS ANY ABOVE CANCELLED

				Large/Small Entity		Fee Code
18. Basic Filing Fee				\$760/\$380	\$760	101/201
19. Total Effective Claims	13	minus 20 =	*0	x \$18/\$9 =	+ 0	103/203
20. Independent Claims	2	minus 3 =	*0	x \$78/\$39 =	+ 0	102/202
				*If answer is zero or less, enter "0"		
21. If <u>any</u> proper multiple dependent claim (ignore improper) is present, add (Leave this line blank if this is a reissue application)				+ \$260/\$130	+ 0	104/204
22. TOTAL FILING FEE ENCLOSED =				\$760		
23. If "non-English" box 2 is X'd, add Rule 17(k) processing fee				+ \$130	+ 0	139
24. If "assignment" box 6 is X'd, add recording fee				+ \$40	+ 40	581
25. <input type="checkbox"/> Attached is a Petition/Fee under Rule No.				+ \$130	+ 0	122
26. TOTAL FEE ENCLOSED =				\$800		

Our Deposit Account No. 03-3975

Our Order No. 60388

C#

265165

M#

CHARGE STATEMENT: The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 (missing or insufficient fee only) now or hereafter relative to this application and the resulting Official document under Rule 20, or credit any overpayment, to our Account/Order Nos. shown above for which purpose a duplicate copy of this sheet is attached.

This **CHARGE STATEMENT** does not authorize charge of the issue fee until/unless an issue fee transmittal form is filed.

Pillsbury Madison & Sutro LLP
Intellectual Property Group


1100 New York Avenue, N.W.
Ninth Floor, East Tower
Washington, D.C. 20005-3918
Tel: (202) 861-3000
GJP/mhn

By Atty:

Glenn J. Perry

Reg. No. 28458

Sig:



Fax: (202) 822-0944

Tel: (202) 861-3070

NOTE: File in duplicate with 2 post card receipts (PAT-103) & attachments

APPLICATION UNDER UNITED STATES PATENT LAWS

Atty. Dkt. No. PM 60388/265165
(M#)

Invention: GAS CONCENTRATION MEASURING APPARATUS DESIGNED TO
MINIMIZE ERROR COMPONENT CONTAINED IN OUTPUT

Inventor(s): HADA, Satoshi
KUROKAWA, Eiichi
KAWASE, Tomoo
SUZUKI, Toshiyuki
HASEDA, Satoshi

Pillsbury Madison & Sutro LLP
Intellectual Property Group
1100 New York Avenue, N.W.
Ninth Floor, East Tower
Washington, D.C. 20005-3918
Attorneys
Telephone: (202) 861-3000

This is a:

- ☐ Provisional Application
- ☒ Regular Utility Application
- ☐ Continuing Application
- ☐ PCT National Phase Application
- ☐ Design Application
- ☐ Reissue Application
- ☐ Plant Application
- ☐ Substitute Specification
Sub. Spec. filed _____
in App. No. _____ / _____
- ☐ Marked Up Specification re
Sub. Spec. filed _____
in App. No. _____ / _____

SPECIFICATION

GAS CONCENTRATION MEASURING APPARATUS DESIGNED TO MINIMIZE ERROR COMPONENT CONTAINED IN OUTPUT

BACKGROUND OF THE INVENTION

1 Technical Field of the Invention

The present invention relates generally to a gas concentration measuring apparatus for measuring the concentration of gases which may be employed in an air-fuel ratio control system for automotive vehicles, and more particularly to a gas concentration measuring apparatus designed to minimize an error component contained in an output thereof.

2 Background Art

Recently, NOx sensors designed to measure the concentration of nitrogen oxide (NOx) contained in exhaust emissions of automotive engines are proposed and put into practical use.

As one of such NOx sensors, a gas sensor is known which is designed to measure the concentrations of NOx and O₂ contained in exhaust gasses of the engine simultaneously. This type of gas sensor includes a pump cell for decomposing or ionizing oxygen molecules contained in exhaust gasses to measure the concentration of O₂ and a sensor cell for decomposing NOx in the oxygen-decomposed exhaust gasses to measure the concentration of NOx. The measurement of the concentration of each of NOx and O₂ is achieved by applying a given voltage to a corresponding one of the pump cell and the sensor cell to induce flow of current as a function of one of the concentrations of NOx and O₂. The current is

outputted from the gas sensor and converted into a voltage signal which is, in turn, used in, for example, an engine control unit of the vehicle.

10 The above gas sensor, however, has the drawback in that the amount of current flowing through the cell sensor as a function of the concentration of NOx is extremely small, so that it apt to interfere with electrical noises, resulting in a failure in measuring the concentration of NOx accurately. Specifically, when the concentration of NOx is within 0 to 2000ppm, a current output from the sensor cell is as little as 5 to 10 μ A. Therefore, in the case where the gas sensor is used in an engine control system of an automotive vehicle, signal outputs from peripheral electrical devices are added to an output of the gas sensor as noises which will produce an error in measuring the concentration of NOx.

15 SUMMARY OF THE INVENTION

It is therefore a principal object of the present invention to avoid the disadvantages of the prior art.

It is another object of the present invention to provide a gas concentration measuring apparatus designed to minimize an error component contained in an output of the apparatus.

According to one aspect of the invention, there is provided a gas concentration measuring apparatus. The gas concentration measuring apparatus includes: (a) a gas concentration sensor outputting a signal as a function of concentration of a given component of gasses; (b) a signal processing circuit processing the signal outputted from the gas concentration sensor to produce a

voltage signal indicative of the concentration of the given component of the gasses; and (c) a conductor electrically connecting the gas concentration sensor and the signal processing circuit for transmission of the signal. The conductor has a length which is
5 determined as a function of a level of the signal outputted from the gas concentration sensor. The weaker the level of the signal is, the shorter the length of the conductor.

In the preferred mode of the invention, a connector is provided which connects the gas concentration sensor with an external device.
10 The connector has disposed therein the signal processing circuit.

An impedance measuring circuit is provided which measures the impedance of a sensor element of the gas concentration sensor. The impedance measuring circuit is integrated in a single unit together with the signal processing circuit.

15 A heater and a heater control circuit are provided. The heater heats up a sensor element of the gas concentration sensor. The heater control circuit controls a power supply to the heater. The heater control circuit is integrated in a single unit together with the signal processing circuit.

20 The gas concentration measuring apparatus may be mounted in a vehicle to measure, for example, the concentrations of O_2 and NO_x contained in exhaust emissions of a combustion engine for use in an air-fuel ratio control. The weaker the level of the signal is, the shorter a distance between the gas concentration sensor and the
25 signal processing circuit for minimizing addition of electrical noises produced by electrical devices mounted in the vehicle to the signal

outputted from the gas concentration sensor.

The gas concentration sensor includes a first cell responsive to application of a voltage to discharge oxygen contained in the gasses outside the gas concentration sensor, producing a first electric
5 current as a function of concentration of the discharged oxygen and a second cell responsive to application of a voltage to produce a second electric current as a function of concentration of a specified gas component contained in the gasses from which the oxygen is discharged by the first cell.

10 The signal processing circuit has a function of compensating for a unit-to-unit variation in characteristic of the gas concentration sensor.

The signal processing circuit corrects an output characteristic of the gas concentration sensor so as to agree with a desired one.

15 The impedance measuring circuit has a function of compensating for a unit-to-unit variation in characteristic of the gas concentration sensor.

The impedance measuring circuit produces an impedance signal indicative of the impedance of the sensor element of the gas
20 concentration sensor and corrects the impedance signal so as to eliminate a variation in the impedance signal caused by the unit-to-unit variation in characteristic of the gas concentration sensor.

The heater control circuit connects with the heater through a power supply conductor for supplying the power to the heater. The
25 heater control circuit has a function of minimizing an error component caused by a resistance value of the power supply

conductor.

The signal processing circuit, the impedance measuring circuit, and the heater control circuit are formed on a bare chip mounted on a ceramic substrate.

5 According to another aspect of the invention, there is provided a gas concentration measuring apparatus which comprises: (a) a gas concentration sensor outputting a signal as a function of concentration of a given component of gasses; (b) a signal processing circuit processing the signal outputted from the gas concentration
10 sensor to provide a voltage signal indicative of the concentration of the given component of the gasses; and (c) a connector having disposed therein the signal processing circuit, the connector having a first end coupled to the signal processing circuit and a second end providing electrical connection with an external device to transmit
15 the voltage signal to the external device.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood more fully from the detailed description given hereinbelow and from the accompanying drawings of the preferred embodiments of the invention, which,
20 however, should not be taken to limit the invention to the specific embodiments but are for the purpose of explanation and understanding only.

In the drawings:

Fig. 1 is a block diagram which shows a gas concentration
25 measuring apparatus according to the invention;

Fig. 2 is an illustration which shows structures of a gas

concentration sensor and a sensor control circuit;

Fig. 3 is a sectional view which shows an internal structure of a gas concentration sensor;

5 Figs. 4(a), 4(b), and 4(c) are sectional views which show a sequence of gas measurement operations of a gas concentration sensor;

Fig. 5 is a graph which shows a relation between a pump cell current produced by a pump cell and a voltage applied to the pump cell;

10 Fig. 6 is a graph which shows a relation between a sensor cell current flowing through a sensor cell and a voltage applied to the sensor cell;

Fig. 7 is a circuit diagram which shows structures of a sensor control circuit and a gas concentration sensor;

15 Fig. 8 is a flowchart of a program performed to control voltages applied to a pump cell and a sensor cell of a gas concentration sensor;

Fig. 9 is a flowchart of a program performed to measure the impedance of a sensor element of a gas concentration sensor;

20 Fig. 10 is a time chart which shows a relation among an output voltage V_s , a terminal voltage V_c , and a terminal voltage V_e ;

Fig. 11 is a perspective view which shows a gas concentration sensor and a connector in which a sensor control circuit and a heater control circuit are disposed;

25 Fig. 12 is a graph which shows a relation of levels of signal outputs from a cup-shaped A/F sensor, a laminated A/F sensor,

and a NOx sensor to the length of an output line extending from each of the sensors;

Fig. 13 is a graph which shows a relation between an actual output of a gas concentration sensor and a correct one; and

5 Fig. 14 is a block diagram which shows a gas concentration measuring apparatus in which output correction circuits are disposed.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, wherein like numbers refer to
10 like parts in several views, particularly to Fig. 1, there is shown a gas concentration measuring apparatus according to the invention which is used with, as one example, an automotive engine control system designed to control the quantity of fuel injected into an internal combustion engine as a function of an output of the gas
15 concentration measuring apparatus under feedback (F/B) control to bring the air-fuel (A/F) ratio into agreement with a target value and to diagnose the deterioration of a catalytic converter installed in an exhaust pipe of the engine.

The gas concentration measuring apparatus uses a composite
20 gas concentration sensor 100 capable of measuring concentrations of oxygen (O_2) and nitrogen oxide (NOx) contained in exhaust gasses of a multi-cylinder four-cycle engine simultaneously.

A fuel injector 12 is installed in an intake pipe 11 to supply the fuel to the engine 10. The gas concentration sensor 100 is installed
25 in an exhaust pipe 13 and outputs sensor signals indicative of the concentration of O_2 and NOx.

The gas concentration sensor 100 has, as shown in Fig. 3, a two-cell structure designed to measure the concentrations of O_2 and NOx contained in exhaust gasses of the engine 10 simultaneously. The gas concentration sensor 100 is made of a lamination of the pump cell 110, the sensor cell 120, a porous diffused layer 101, an air duct 102, an insulating layer 104, and a heater 103. The gas concentration sensor 100 is installed at the right side thereof, as viewed in the drawing, on the exhaust pipe 13 of the engine so as to expose upper, lower, and left surfaces to exhaust gasses.

The pump cell 110 is disposed on the porous diffused layer 101 so that it is exposed to the exhaust gasses. A first pump cell electrode 111 is mounted on the upper surface of the pump cell 110. A second pump cell electrode 112 is mounted on the lower surface of the pump cell 110 facing the porous diffused layer 101. The sensor cell 120 is interposed between the porous diffused layer 101 and the air duct 102. A first sensor cell electrode 121 is attached to an upper surface of the sensor cell 120 facing the porous diffused layer 101. A second sensor cell electrode 122 is attached to a lower surface of the sensor cell 120 facing the air duct 102. The exhaust gasses enters the porous diffused layer 101 from the left side thereof, as viewed in the drawing, and flow in the right direction.

The pump cell 110 and the sensor cell 120 are each formed with a solid electrolyte lamination such as an oxygen ion conductive oxide sintered member made from ZrO_2 , HfO_2 , ThO_2 , and Bi_2O_3 in which CaO, MgO, Y_2O_3 , and Yb_2O_3 are solved as fixing agents. The porous diffused layer 101 is made of a heat-resisting inorganic

matter such as alumina, magnesia, silica, spinel, and mullite.

The first pump cell electrode 111 and the first and second sensor cell electrodes 121 and 122 are each made of a noble metal with a high catalytic activity such as platinum (Pt), while the second
 5 pump electrode 112 is made of a noble metal such as Au-Pt which is inactive with respect to NOx, that is, hardly decomposes NOx.

The heater 103 is embedded in the insulating layer 104. The insulating layer 104 defines the air duct 102 between itself and the sensor cell 120. The air duct 102 serves as a reference gas chamber
 10 into which the air is introduced. The air in the reference gas chamber is used as a reference gas in measuring the concentration of O₂. The insulating layer 104 is made of alumina. The heater 103 is made of platinum and cermet such as alumina and supplied with power from a heater control circuit, as will be described later in
 15 detail, to produce the heat for activating the whole of the gas concentration sensor 100.

In operation, when exhaust gasses containing O₂, NOx, CO₂, and H₂O, as shown in Fig. 4(a), enter the porous diffused layer 101 and are passing the pump cell 110, application of voltage to the
 20 pump cell 110 through the electrodes 111 and 112 causes the exhaust gasses to undergo decomposition. Since the second pump cell electrode 112 is, as described above, made of a noble metal which hardly decomposes NOx, only O₂ molecules contained in the exhaust gasses are decomposed or ionized by the pump cell 110, as
 25 shown in Fig. 4(b), which are, in turn, returned to the exhaust gasses from the first pump cell electrode 111, thereby causing a

limiting current (also referred to as a pump cell current below) to flow through the pump cell 110 as a function of the concentration of O_2 in the exhaust gasses.

The O_2 molecules in the exhaust gasses are usually not decomposed by the pump cell 110 completely, so that residual O_2 molecules reach the sensor cell 120. The application of voltage to the sensor cell 120 causes the first sensor cell electrode 121 to decompose the O_2 and NO_x molecules, as shown in Fig. 4(c), so that oxygen ions are discharged to the air duct 102 through the second sensor cell electrode 122, thereby causing a limiting current (also referred to as a sensor cell current or a NO_x current below) to flow through the sensor cell 120 as a function of the concentration of NO_x .

Fig. 5 shows a V-I relation between the voltage applied to the pump cell 110 and the pump cell current (mA) outputted from the pump cell 110. Straight segments of lines extending parallel to the abscissa axis indicate limiting current measurable ranges, respectively, which are shifted to the positive side of voltage applied to the pump cell 110 as the concentration of O_2 increases. Therefore, if the voltage applied to the pump cell 110 is kept constant when the concentration of O_2 is changing, the concentration of O_2 may exceed a corresponding one of the limiting current measurable ranges, resulting in difficulty in measuring the concentration of O_2 accurately. This also means that a large quantity of O_2 reaches the sensor cell 120 without being discharged from the pump cell 110, thereby causing an error component

contained in the NOx current to be increased. In order to avoid this, the voltage to be applied to the pump cell 110 is regulated so that it changes at a rate equivalent to a rate of change in dc resistance component of the pump cell 110 as a function of the voltage applied to the pump cell 110. Specifically, the voltage to be applied to the pump cell 110 is changed along a broken line LX1 so that an output of the pump cell 110 may fall within any one of the limiting current measurable ranges at all the time regardless of the concentration of O₂ in the exhaust gasses.

- Fig. 6 shows a V-I relation between the voltage applied to the sensor cell 120 and the sensor cell current (mA) outputted from the sensor cell 120. In a range where the concentration of NOx is zero (0) ppm, only a current, as indicated by A1, produced by the residual O₂ molecules flowing through the porous diffused layer 101 to the sensor cell 120 is outputted from the sensor cell 120 as the offset current. In a range where the concentration of NOx is greater than zero (0) and smaller than 1,000 ppm, a current, as indicated by A2, produced by the decomposition of NOx by the sensor cell 120 is also outputted from the sensor cell 120. If the voltage applied to the sensor cell 120 exceeds a certain upper limit, it will cause an additional current, as indicated by A3, produced by decomposition of H₂O to be also outputted from the sensor cell 120. Straight segments of lines extending parallel to the abscissa axis indicate limiting current measurable ranges, respectively, where it is possible to measure the NOx decomposition-produced current and which are slightly shifted to the positive side of voltage applied to the sensor

cell 120 as the concentration of NO_x increases. The voltage applied to the sensor cell 120 is, therefore, controlled along a broken line LX2 so that an output of the sensor cell 120 may fall within one of the limiting current measurable ranges at all the time regardless of the concentration of NO_x in the exhaust gasses.

Returning back to Fig. 1, the gas concentration measuring apparatus also includes an electronic control unit (ECU) 20, a sensor control circuit 510, and a heater control circuit 520.

The ECU 20 receives an output of the gas concentration sensor 100 and engine operating data on engine speed, inlet air pressure, water temperature, and throttle opening measured by known sensors (not shown) to control the quantity of fuel supplied by the fuel injector 12 and the ignition timing through an ignition system 15. The ECU 20 also receives an O₂ concentration signal which is proportional to an air-fuel ratio of a mixture supplied to the engine 10 and which will also be referred to as an A/F signal and a NO_x concentration signal outputted from the sensor control circuit 510.

The sensor control circuit 510 picks up the pump cell current and the sensor cell current from the gas concentration sensor 100 to calculate the concentrations of O₂ and NO_x in the exhaust gasses and outputs signals indicative thereof to the ECU 20. The sensor control circuit 510 also picks up data on a sensor element temperature determined as a function of a sensor element resistance which indicates the active state of the gas concentration sensor 100 and outputs a signal indicative thereof to the ECU 20.

The heater control circuit 520, as will be described later in detail,

receives the sensor element temperature data from the ECU 20 to control the power supply to the heater 103 for maintaining the gas concentration sensor 100 activated.

The sensor control circuit 510 and the heater control circuit 520 are built in a connector 300 connecting between the ECU 20 and the gas concentration sensor 100. Specifically, in a typical prior art structure, the sensor control circuit 510 and the heater control circuit 520 are disposed in the ECU 20, but in this embodiment, they are integrated near the gas concentration sensor 100. This is because there are three main reasons below:

1 The sensor cell current flowing through the sensor cell is in the range of 0 to $2.5\mu\text{A}$, corresponding to a NOx concentration between 0 and 500ppm. The detection of $\pm 5\text{ppm}$ requires a measurement accuracy better than $\pm 25\text{nA}$. Such low currents are very sensitive to electromagnetic fields and noise if flowing in long wires.

2 For the achievement of a resolution of 2.5nA , the insulation resistance between wires of a circuit measuring the sensor cell current. This value is much higher than what can be realized within standard automotive wiring harness environment.

3 The exact calibration for the NOx and O₂ characteristics (gain and offset) in serial production referring to piece to piece variation can be more easily achieved with a circuit which is nearest to the gas concentration sensor 100.

The oxygen concentration determining circuit 511, the NOx concentration determining circuit 512, the impedance measuring circuit 513, and the heater control circuit 520 may be formed on a

single bare chip mounted on a ceramic substrate or a ceramic multi-layered board, thereby also resulting in a compact structure and greatly improved heat and vibration resistances. The sensor control circuit 510 connects electrically with the gas concentration
5 sensor 100 through conductors 401. The heater control circuit 520 connects electrically with the heater 103 through a conductor 402.

The gas concentration sensor 100, as clearly shown in Fig. 11, has a cover 160 and a sensor element 150 disposed within the cover 160. The sensor element 150 consists of the pump cell 110, the
10 sensor cell 120, and the heater 103, as shown in Fig. 3. The cover 160 has formed therein a plurality of pin holes through which the exhaust gasses flow into the cover 160. The connector 300 includes a casing 310 and a plug 320. The casing 310 has disposed therein the sensor control circuit 510 and the heater control circuit
15 520, thereby minimizing addition of external electric noises thereto.

The sensor control circuit 510 includes, as clearly shown in Fig. 2, an oxygen concentration determining circuit 511, a NOx concentration determining circuit 512, and a sensor element impedance measuring circuit 513.

20 The oxygen concentration determining circuit 511 is connected to the pump cell 110 of the gas concentration sensor 100 to measure an electric current or the pump cell current flowing through the pump cell 110 as a function of the concentration of O₂ and converts it into a voltage signal which is, in turn, outputted to the ECU 20.
25 The oxygen concentration determining circuit 511 is also responsive to the pump cell current to adjust the voltage applied to the pump

cell 110. Similarly, the NO_x concentration determining circuit 512 is connected to the sensor cell 120 to measure an electric current or the sensor cell current flowing through the sensor cell 120 as a function of the concentration of NO_x and converts it into a voltage signal which is, in turn, outputted to the ECU 20. The NO_x concentration determining circuit 512 is also responsive to the sensor cell current to adjust the voltage applied to the sensor cell 120.

The sensor element impedance measuring circuit 513 measures the impedance of the sensor cell 120 or the pump cell 110 in a sweep method and outputs a signal indicative thereof to the heater control circuit 520.

The heater control circuit 520 is responsive to the signal indicative of the impedance outputted from the sensor cell impedance measuring circuit 513 to control the power supply to the heater 103. Japanese Patent Application No. 10-275521 and Japanese Patent First Publication No. 8-278279 teach heater control systems, disclosure of which is incorporated herein by reference.

The sensor control circuit 510 includes, as clearly shown in Fig. 7, a microcomputer 200 consisting of a CPU, A/D converters, and D/A converters. To the A/D converters A/D0 to A/D3, voltages appearing at terminals V_c , V_e , V_d , and V_b are inputted. From the D/A converters D/A1 and D/A0, a pump cell control voltage V_b and the sensor cell control voltage V_c are outputted. From the D/A converters D/A2 and D/A3, an O₂ concentration output and a NO_x

concentration output are provided.

Specifically, the pump cell control voltage V_b is inputted to a non-inverting input of the amplifier 211. An output of the amplifier 211 is connected to one end of the resistor 212 used in measuring the pump cell current I_p flowing through the pump cell 110 as a function of the concentration of O_2 . The other end of the resistor 212 is connected to the first pump cell electrode 111 of the gas concentration sensor 100 and an inverting input of the amplifier 211, thereby controlling the voltage appearing at the first pump cell electrode 111 so as to be kept at the same potential as the pump cell control voltage V_b . The resistor 212 also connects at both ends to the A/D converters A/D2 and A/D3.

Therefore, application of the pump cell control voltage V_b to the pump cell 110 from the sensor control circuit 510 will cause the pump cell current I_p to flow through the resistor 212. The pump cell current I_p is given by the following equation:

$$I_p = (V_d - V_b) / R_1$$

where V_b and V_d are voltages appearing at the terminals V_b and V_d across the resistor 212, and R_1 is a resistance value of the resistor 212.

The microcomputer 200, the amplifier 211, and the resistor 212 constitute the oxygen concentration determining circuit 511.

The sensor cell control voltage V_c outputted from the D/A converter D/A0 is inputted to a non-inverting input of the amplifier

221 through a low-pass filter 230. The low-pass filter 230 may be a primary filter consisting of a capacitor. An output of the amplifier 221 is connected to one end of the resistor 222 used in measuring the sensor cell current I_s flowing through the sensor cell 120 as a function of the concentration of NO_x. The other end of the resistor 222 is connected to the second sensor cell electrode 122 of the gas concentration sensor 100 and an inverting input of the amplifier 221, thereby controlling the voltage appearing at the second sensor cell electrode 122 to be kept at the same potential as the sensor cell control voltage V_c . The resistor 222 connects at both ends thereof to the A/D converters A/D0 and A/D1 of the microcomputer 200.

Therefore, application of the sensor cell control voltage V_c to the sensor cell 120 from the sensor control circuit 510 will cause the sensor cell current I_s to flow through the resistor 222. The sensor cell current I_s is given by the following equation:

$$I_s = (V_e - V_c) / R_2$$

where V_e and V_c are voltages appearing at the terminals V_e and V_c across the resistor 222 and R_2 is a resistance value of the resistor 222.

The microcomputer 200, the amplifier 221, and the resistor 222 constitute the NO_x concentration determining circuit 512.

The microcomputer 200 measures an a.c. impedance of the sensor cell 120 using the sweep method. Specifically, the measurement of the AC impedance is achieved by changing the

sensor cell control voltage V_c outputted from the D/A converter D/A0 instantaneously to apply an ac voltage to the sensor cell 120 which is blurred in the form of a sine wave through the low-pass filter 230. The frequency of the ac voltage is preferably higher than 10KHz. The time constant of the low-pass filter 230 is in the order of $5\mu s$. The microcomputer 200 monitors changes in voltage V_e and V_c appearing at the terminals V_e and V_c through the A/D converters A/D1 and A/D0 to determine a change in voltage difference across the resistor 222 and a change in sensor current and calculates the a.c. impedance of the sensor cell 120 based on the changes in voltage difference and sensor current. The microcomputer 200 outputs a signal indicative of the a.c. impedance of the sensor cell 120 to the heater control circuit 520 through a D/A converter or a serial communication port.

The microcomputer 200, the amplifier 221, and the resistor 222 constitute the sensor element impedance measuring circuit 513.

The microcomputer 200 outputs a control signal having a given duty factor through an I/O port to operate a MOSFET driver 521. The MOSFET driver 521 activates the MOSFET 522 to regulate the power supplied from a power source 523 such as a battery to the heater 103 under the PWM control. The microcomputer 200, the MOSFET driver 521, and the MOSFET 522 constitute the heater control circuit 520.

Fig. 8 shows a flowchart of a program or a sequence of logical steps performed by the CPU of the microcomputer 200 in the course of execution of a main program (not shown), for example, an air-fuel

ratio control program to control the pump cell control voltage V_b and the sensor cell control voltage V_c inputted to the pump cell 110 and the sensor cell 120.

First, in step 101, the CPU picks up the voltage V_d which is
 5 developed at the terminal V_d (i.e., one end of the resistor 212) and converted into a digital signal through the A/D converter A/D2. Similarly, in steps 102, 103, and 104, the CPU picks up the voltages V_b , V_e , and V_c which are developed at the terminals V_c , V_e , and V_c and converted into digital signals through the A/D converters A/D3,
 10 A/D1, and A/D0, respectively.

After step 104, the routine proceeds to step 105 wherein the pump cell current $I_p (= (V_d - V_b) / R1)$ is determined. The routine proceeds to step 106 wherein a target input voltage to be applied to the pump cell 110 is determined which corresponds to the pump cell
 15 current I_p on the voltage line LX1 shown in Fig. 5. The routine proceeds to step 107 wherein the target input voltage determined in step 106 is outputted as the pump cell control voltage V_b through the D/A converter D/A1.

The routine proceeds to step 108 wherein the sensor cell
 20 current $I_s (= (V_e - V_c) / R2)$ is determined. The routine proceeds to step 109 wherein a target input voltage to be applied to the sensor cell 120 is determined which corresponds to the sensor cell current I_s on the voltage line LX2 shown in Fig. 6. The routine proceeds to step 110 wherein the target input voltage determined in step 109 is
 25 outputted as the sensor cell control voltage V_c through the D/A converter D/A0.

The routine proceeds to step 111 wherein the sensor cell current I_s is outputted as indicating the concentration of NO_x to the ECU 20 through, for example, a serial communication port. The routine proceeds to step 112 wherein the pump cell current I_p is
 5 outputted as indicating the concentration of O₂ to the ECU 20 through, for example, a serial communication port.

Fig. 9 shows a subprogram for determining the sensor element impedance which is executed by the CPU of the microcomputer 200 selectively at regular intervals of 128ms in a start-up mode of engine
 10 operation and at regular intervals of 256ms after the engine is warmed up.

After entering the program, the routine proceeds to steps 201 and 202 wherein the voltages V_e and V_c developed across the resistor 222 are picked up through the A/D converters A/D1 and
 15 A/D0, which will be referred to as V_{e1} and V_{e2} below.

The routine proceeds to step 203 wherein the sum of a sensor cell control voltage V_s now applied to the sensor cell 120 and an additional a.c. voltage ΔV_s is outputted from the D/A converter D/A0, thereby causing, as shown in Fig. 10, the voltages V_c and V_e
 20 developed across the resistor 222 to change in the form of a sine wave according to the time constant of the low-pass filter 230.

The routine proceeds to steps 204 and 205 wherein the voltages appearing at the terminals V_e and V_c , which will be referred to as V_{e2} and V_{c2} below, are picked up 20 μ s after the voltage applied to the resistor 222 is changed in step 203.

The routine proceeds to step 206 wherein the impedance Z_{ac} of

the sensor cell 120 is calculated according to an equation below:

$$Zac = (Vc2 - Vc1) / \{(Ve2 - Vc2) - (Ve1 - Vc1)\}$$

5 The routine proceeds to step 207 wherein a negative voltage Δ
Vs2 is, as shown in Fig. 10, outputted from the D/A converter D/A0
temporarily to return the voltage applied to the sensor cell 120 to the
voltage Vs.

10 An electric current flowing through the gas concentration
sensor 100 as a function of the concentration of each of O₂ and NO_x
is, as described above, extremely weak, so that it apt to interfere
with electrical noises produced from peripheral devices.
Particularly, when the concentration of NO_x is within 0 to 2000ppm,
the current outputted from the gas concentration sensor 100 as a
15 function of the concentration of NO_x is, as shown in Fig. 6, as little
as 5 to 10 μ A, thus resulting in a failure in measuring the
concentration of NO_x accurately. In order to avoid this problem,
this embodiment specifies the length of the conductors 401
connecting between the gas concentration sensor 100 and the
20 sensor control circuit 510 and the length of the conductor 402
connecting between the heater 103 and the heater control circuit
520 using a suitable relation, as shown in Fig. 12, between the
length of a wire extending from each of a cup-shaped A/F sensor, a
laminated A/F sensor, and a NO_x sensor (i.e., the gas concentration
25 sensor 100) and the level of an output signal thereof.

Generally, a gas concentration sensor such as the one in this

embodiment designed to measure the concentration of NO_x is required to shorten the length of wire extending therefrom as compared with the cup-shaped or laminated A/F sensors.

Minimizing the interference of an output of the gas concentration sensor 100 with electric noises, thus, requires decreasing the length of the conductors 401 and 402. Further, in a case where the gas concentration sensor 100 is mounted in an automotive vehicle, various electric noises are added to an output of the gas concentration sensor 100. Therefore, the lower the level of the output of the gas concentration sensor 100, the better the decrease in distance between the gas concentration sensor 100 and the connector 300 to minimize the electric noises.

The sensor element of the gas concentration sensor 100 contains ceramic, so that it has characteristics of a flow of d.c. current, and a flow of a.c. current, and an output indicating the concentration of gas that undergo an inevitable unit-to-unit deviation in mass production, thus resulting in a decrease in production yield. Specifically, a small variation in production condition will cause the characteristics and the impedance of sensors to change. Some of the sensors whose characteristics are below standards are usually discarded, thus resulting in a decrease in production yield. For example, when the concentration of O₂ varies, as shown in Fig. 13, an actual output of the gas concentration sensor 100, as indicated by a solid line, is shifted from a correct one, as indicated by a broken line.

Additionally, the resistance value of the heater 103 is set small

in order to speed up the activity of the gas concentration sensor 100. At the start of the control of the heater 103, it is usually difficult to measure the impedance of the gas concentration sensor 100 sensor accurately. The ECU 20 may, thus, monitor the power supplied to the heater 103 from the heater control circuit 520 (i.e., the heater voltage and current) and provide a power supply control signal to the heater control circuit 520. If, therefore, the resistance value of the conductor 402 (including resistance values of the heater 103 and the heater control circuit 520) differs among vehicles, it will cause the controllability of the heater 103 to vary, resulting in, for example, a decrease in heat produced by the heater 103 and an error in measuring the power supplied to the heater 103, which may lead to a delay in activating the gas concentration sensor 100 and overheating thereof.

In order to avoid the above problems, the sensor control circuit 510 of this embodiment is, as described later in detail, designed to adjust or correct the characteristics of the gas concentration sensor 100, and the heater control circuit 520 is designed to compensate for the error in measuring the power supplied to the heater 103 depending upon the resistance of the conductor 402.

Specifically, the correction of the characteristics of the gas concentration sensor 100 and the compensation of the error in measuring the power supplied to the heater 103 are accomplished with gain adjustment and offset adjustment in the sensor control circuit 510 and the heater control circuit 520 in manufacturing processes. Such adjustments may be achieved with

- 1 installation of adjustment parts,
- 2 installation and trimming of a thick-film resistor, or
- 3 trimming a resistor on an IC chip in which the sensor control circuit 510 and the heater control circuit 520 are integrated.

5 As one example, correction circuit 531, 532, and 533, as shown in Fig. 14, may be connected to outputs of the oxygen concentration determining circuit 512, the NOx concentration determining circuit 512, and the impedance measuring circuit 513, respectively. Each of the correction circuits 531, 532, and 533 is made of a resistor
10 such as a shunt which is trimmed to adjust a resistance value thereof so as to bring an actual output of a corresponding one of the oxygen concentration determining circuit 511, the NOx concentration determining circuit 512, and the impedance measuring circuit 533 into agreement with a correct or desired one.

15 Alternatively, a gain/offset adjustment map may be pre-stored in the microcomputer 200 which is used in calculating and adjusting a gain or an offset of the amplifiers 211 and 221 to bring an actual output of each of the oxygen concentration determining circuit 512, the NOx concentration determining circuit 512, and the
20 impedance measuring circuit 533 into agreement with a correct or desired one. Instead of use of the gain/offset adjustment map, parameters used in calculating and adjusting the gain and offset may be inputted directly to the microcomputer 200 through an A/D converter.

25 In order to eliminate an error component contained in an output signal of the heater control circuit 520 indicating the amount of

power supplied to the heater 103 due to the resistance of the conductor 402, a correction circuit 534, similar to one of the correction circuits 531, 532, and 533, may be built in the heater control circuit 520. Alternatively, the microcomputer 200 may
5 calculate a gain or an offset of the heater control circuit 520 in the same manner as described above to bring the output signal into agreement with a correct one.

While the present invention has been disclosed in terms of the preferred embodiments in order to facilitate better understanding
10 thereof, it should be appreciated that the invention can be embodied in various ways without departing from the principle of the invention. Therefore, the invention should be understood to include all possible embodiments and modifications to the shown embodiments which can be embodied without departing from the principle of the
15 invention as set forth in the appended claims.

For example, only the NO_x concentration determining circuit 512 which receives a weak electrical signal (i.e., the sensor cell current) from the gas concentration sensor 100 may be disposed within the connector 300 to shorten the distance to the gas
20 concentration sensor 100 or the length of a conductor connecting between the NO_x concentration determining circuit 512 and the gas concentration sensor 100 for minimizing addition of electrical noises. Additionally, any one of the oxygen concentration determining circuit 511, the impedance measuring circuit 513, and the heater
25 control circuit 520 may also be disposed within the connector 300, thereby allowing the length of conductors between the circuits 511,

512, 513, and 520 and the gas concentration sensor 100 to be determined selectively, thus resulting in an increase in freedom of design.

The first sensor cell electrode 121 and the second pump cell
5 electrode 112 are, as clearly shown in Fig. 7, connected to ground, but may alternatively be connected to a common terminal which is kept at a positive potential. This allows a negative electric current to flow through each of the pump cell 110 and the sensor cell 120. Thus, even when a rich gas which usually reduces a flow of the
10 negative current and changes a balance of concentration of O_2 in the porous diffused layer 101 enters the gas concentration sensor 100, it becomes possible to keep the concentration of gas, for example, O_2 in the porous diffused layer 101 at a constant value equivalent to the stoichiometric. This enables the rich gas to be measured
15 accurately, thus resulting in an increase in measurable range of the gas concentration sensor 100 and also results in greatly improved response rate of the gas concentration sensor 100 when the gas returns from the rich to lean side.

The present invention may be used with an air-fuel ratio (A/F)
20 sensor designed to measure the concentration of O_2 contained in exhaust gasses of an internal combustion engine for determining an air-fuel ratio of a mixture supplied to the engine. As such an A/F sensor, a cup-shaped A/F sensor in which a solid electrolyte body and a diffused resistance layer are cup-shaped and a laminated A/F
25 sensor made of a lamination of a solid electrolyte plate and a diffused resistance layer are known. When the air-fuel ratio is 12 to

18, the laminated A/F sensor outputs a current signal of as little as -0.75 to 0.4mA, but the structure of this invention reduces addition of electric noises to an output of the laminated A/F sensor sufficiently.

- 5 The present invention may also be used with three-cell or four-cell gas concentration sensors which are known in the art.

 The present invention may further be used with a gas concentration sensor which is designed to decompose and discharge O_2 contained in gasses to be measured through a pump cell and
10 decompose HC and/or CO contained in the gasses after the decomposition of O_2 through a sensor cell for determining the concentration of O_2 and the concentration of HC and/or CO.

What is claimed is:

1. A gas concentration measuring apparatus comprising:
a gas concentration sensor outputting a signal as a function of
5 concentration of a given component of gasses;
a signal processing circuit processing the signal outputted from
said gas concentration sensor to produce a voltage signal indicative
of the concentration of the given component of the gasses; and
a conductor electrically connecting said gas concentration
10 sensor and said signal processing circuit for transmission of the
signal, the conductor having a length which is determined as a
function of a level of the signal outputted from said gas
concentration sensor, the weaker the level of the signal, the shorter
the length of said conductor.
15
2. A gas concentration measuring apparatus as set forth in claim 1,
further comprising a connector for connecting said gas
concentration sensor with an external device, said connector having
disposed therein said signal processing circuit.
20
3. A gas concentration measuring apparatus as set forth in claim 1,
further comprising an impedance measuring circuit measuring an
impedance of a sensor element of said gas concentration sensor,
said impedance measuring circuit being integrated in a single unit
25 together with said signal processing circuit.

4. A gas concentration measuring apparatus as set forth in claim 1,
further comprising a heater which heats up a sensor element of said
gas concentration sensor and a heater control circuit which controls
a power supply to said heater, and wherein the heater control circuit
5 is integrated in a single unit together with said signal processing
circuit.
5. A gas concentration measuring apparatus as set forth in claim 1,
wherein the gas concentration measuring apparatus is mounted in a
10 vehicle, and wherein the weaker the level of the signal is, the shorter
a distance between said gas concentration sensor and said signal
processing circuit.
6. A gas concentration measuring apparatus as set forth in claim 1,
15 wherein said gas concentration sensor includes a first cell
responsive to application of a voltage to discharge oxygen contained
in the gasses outside said gas concentration sensor, producing a
first electric current as a function of concentration of the discharged
oxygen and a second cell responsive to application of a voltage to
20 produce a second electric current as a function of concentration of a
specified gas component contained in the gasses from which the
oxygen is discharged by the first cell.
7. A gas concentration measuring apparatus as set forth in claim 1,
25 wherein said signal processing circuit has a function of
compensating for a unit-to-unit variation in characteristic of said


gas concentration sensor.

8. A gas concentration measuring apparatus as set forth in claim 7,
wherein said signal processing circuit corrects an output
5 characteristic of said gas concentration sensor so as to agree with a
desired one.
9. A gas concentration measuring apparatus as set forth in claim 3,
wherein said impedance measuring circuit has a function of
10 compensating for a unit-to-unit variation in characteristic of said
gas concentration sensor.
10. A gas concentration measuring apparatus as set forth in claim 9,
wherein said impedance measuring circuit produces an impedance
15 signal indicative of the impedance of the sensor element of said gas
concentration sensor and corrects the impedance signal so as to
eliminate a variation in the impedance signal caused by the unit-
to-unit variation in characteristic of said gas concentration sensor.
- 20 11. A gas concentration measuring apparatus as set forth in claim 4,
wherein said heater control circuit connects with said heater
through a power supply conductor for supplying the power to said
heater, said heater control circuit having a function of minimizing an
error component caused by a resistance value of the power supply
25 conductor.

12. A gas concentration measuring apparatus as set forth in claim 1,
further comprising an impedance measuring circuit measuring an
impedance of a sensor element of said gas concentration sensor, a
heater heating up a sensor element of said gas concentration sensor,
5 and a heater control circuit which controls a power supply to said
heater, and wherein said signal processing circuit, said impedance
measuring circuit, and said heater control circuit are formed on a
bare chip mounted on a ceramic substrate.
- 10 13. A gas concentration measuring apparatus comprising:
a gas concentration sensor outputting a signal as a function of
concentration of a given component of gasses;
a signal processing circuit processing the signal outputted from
said gas concentration sensor to provide a voltage signal indicative
15 of the concentration of the given component of the gasses; and
a connector having disposed therein said signal processing
circuit, said connector having a first end coupled to said signal
processing circuit and a second end providing electrical connection
with an external device to transmit the voltage signal to said external
20 device.

ABSTRACT

A gas concentration measuring apparatus which has a gas sensor designed to measure, for example, the concentrations of O_2 and HOx contained in exhaust emissions of an automotive engine is provided. The apparatus includes a signal processing circuit which converts a current signal outputted from the gas sensor as a function of the concentration of either of O_2 and HOx into a voltage signal. The gas sensor and the signal processing circuit are connected electrically through a conductor. The conductor has a length which is determined as a function of a level of the current signal outputted from the gas sensor. The weaker the level of the current signal is, the shorter the length of the conductor. This minimizes addition of electrical noises to the current signal outputted from the gas sensor.

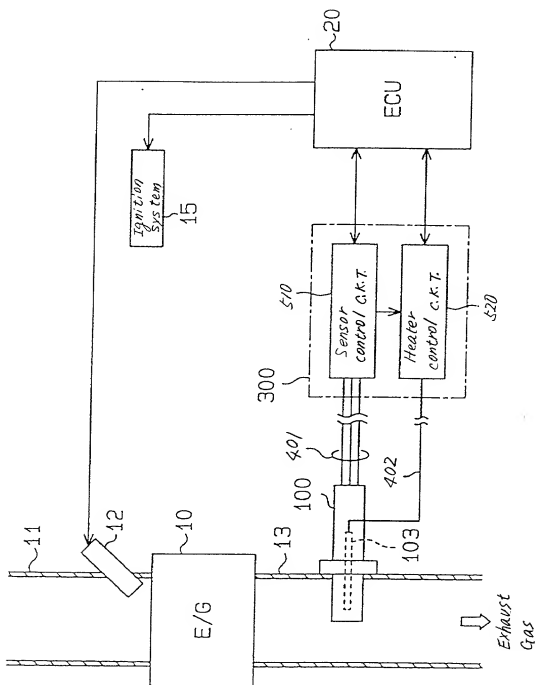

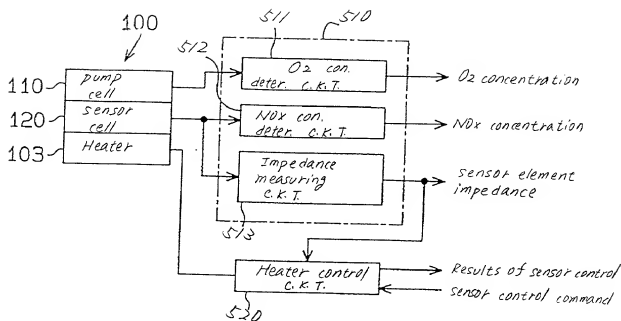


FIG. 2

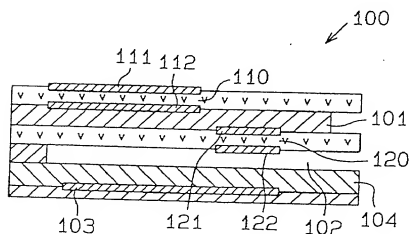


FIG. 3

FIG. 4(a)

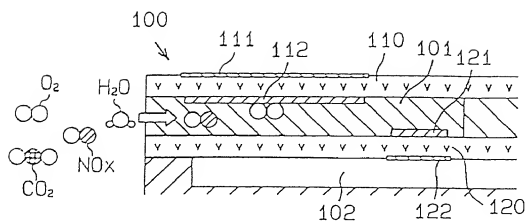


FIG. 4(b)

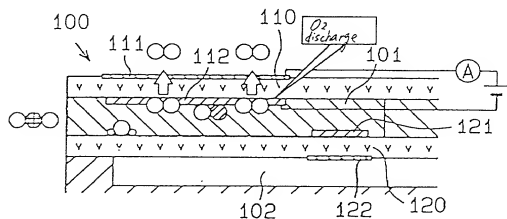


FIG. 4(c)

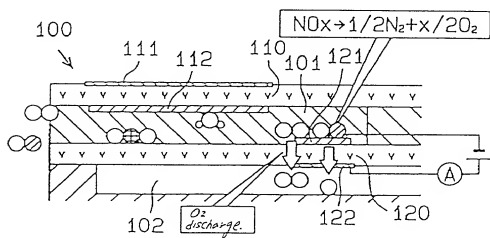


FIG. 5

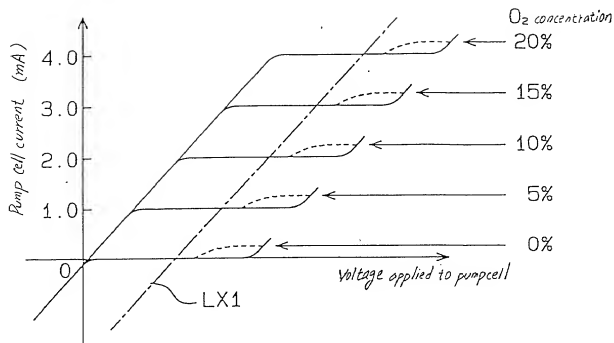
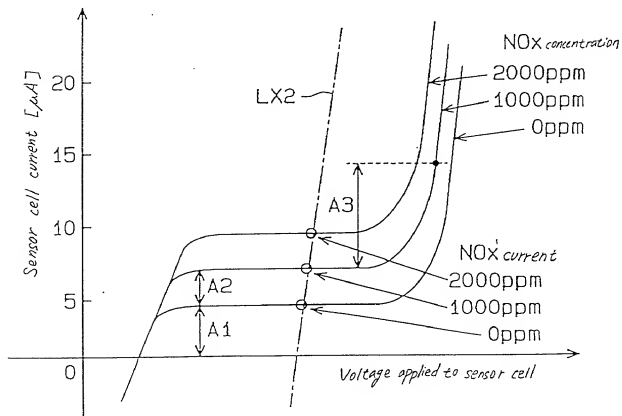


FIG. 6



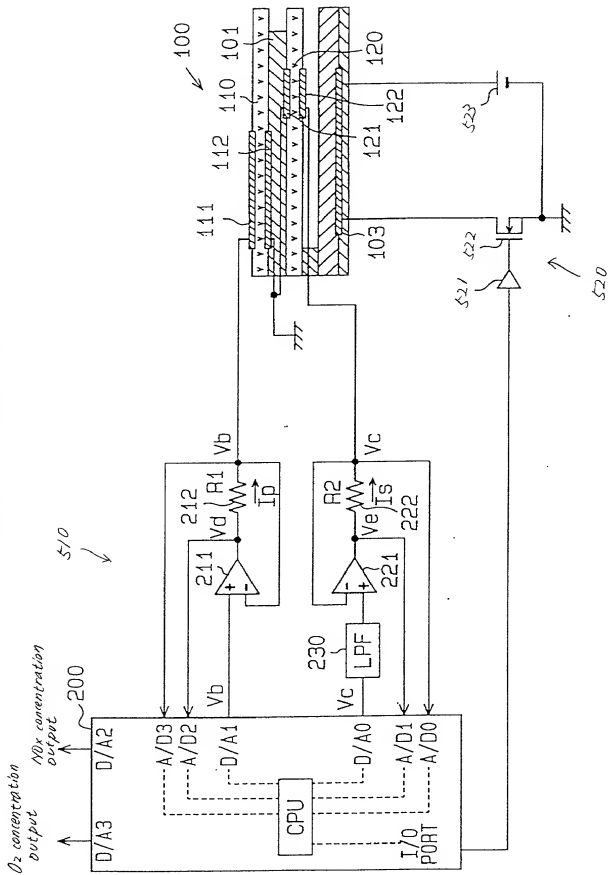


FIG. 7

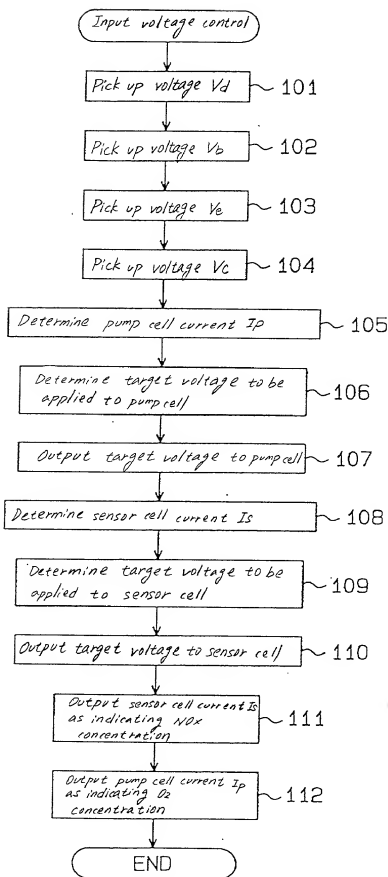


FIG. 8

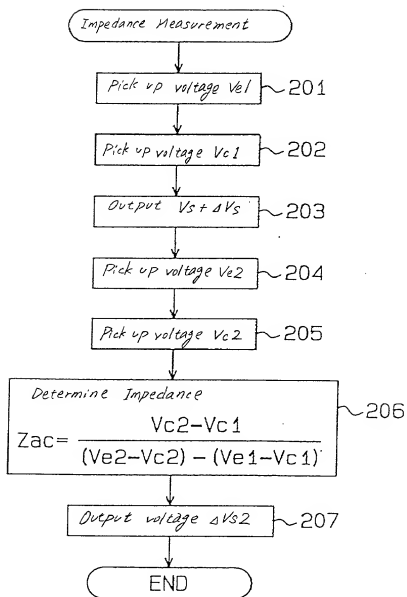


FIG. 9

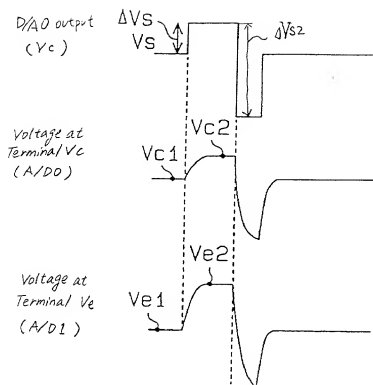


FIG. 10

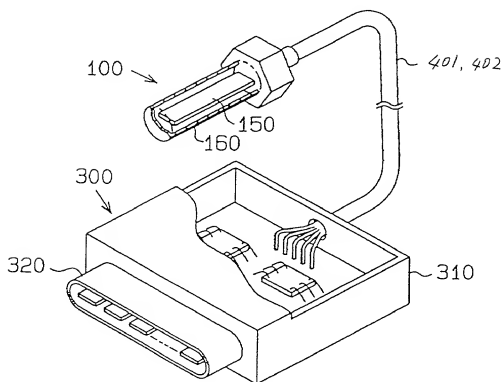


FIG. 11

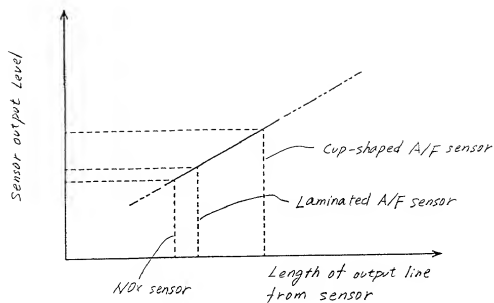


FIG. 12

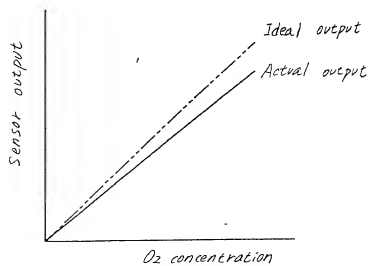


FIG. 13

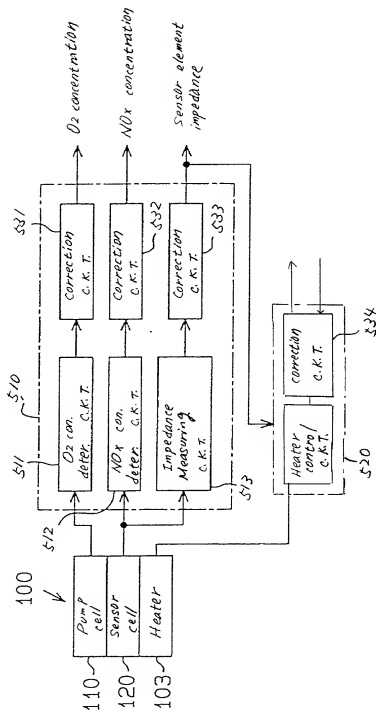


FIG. 14

FOR UTILITY/DESIGN
CIP/PCT NATIONAL/PATENT
ORIGINAL/SUBSTITUTE/SUPPLEMENTAL
DECLARATIONS

RULE 63 (37 C.F.R. 1.63)
DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

51956-US
u3-9941-YK PM&S
FORM

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the INVENTION ENTITLED GAS CONCENTRATION MEASURING APPARATUS DESIGNED TO MINIMIZE ERROR COMPONENT CONTAINED IN OUTPUT

the specification of which (CHECK applicable BOX(ES))

X ☒ [X] is attached hereto.

BOX(ES) ☐ [] was filed on _____ as U.S. Application No. 0_/_____
☐ [] was filed as PCT International Application No. PCT/_____/_____
on _____

☒ and (if U.S. or PCT application amended) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56. I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which priority is claimed, or (2) if no priority claimed, before the filing date of this application:

PRIOR FOREIGN APPLICATION(S)			Date first Laid- open or Published	Date Patented or Granted	Priority Claimed	
Number	Country	Day/MONTH/Year Filed			Yes	No
10-345654	Japan	December 4, 1998			X	

I hereby claim domestic priority benefit under 35 U.S.C. 119/120/365 of the indicated United States applications listed below and PCT international applications listed above or below and, if this is a continuation-in-part (CIP) application, insofar as the subject matter disclosed and claimed in this application is in addition to that disclosed in such prior applications, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of each such prior application and the national or PCT international filing date of this application:

PRIOR U.S. PROVISIONAL, NONPROVISIONAL AND/OR PCT APPLICATION(S)		Status	Priority Claimed
Application No. (series code/serial no.)	Day/MONTH/Year Filed	pending, abandoned, patented	Yes No

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint Pillsbury Madison & Sutro LLP, Intellectual Property Group, 1100 New York Avenue, N.W., Ninth Floor, East Tower, Washington, D.C. 20005-3918, telephone number (202) 861-3000 (to whom all communications are to be directed), and the below-named persons (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent, and I hereby authorize them to delete names/numbers below of persons no longer with their firm and to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/ organization who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct the above firm and/or a below attorney in writing to the contrary.

Paul N. Kokulis	16773	Dale S. Lazar	28872	Mark G. Paulson	30793	Michael R. Dzwonczyk	36787
Raymond F. Lippitt	17519	Paul E. White, Jr.	32011	Stephen C. Glazier	31361	W. Patrick Bengtsson	32456
G. Lloyd Knight	17698	Glenn J. Perry	28458	Paul F. McQuade	31542	Jack S. Barufka	37087
Carl G. Love	18781	Kendrew H. Colton	30368	Ruth N. Morduch	31044	Adam R. Hess	41835
Kevin E. Joyce	20508	G. Paul Edgecliff	24238	Richard H. Zaitlen	27248		
George M. Sirilla	18221	Lynn E. Eccleston	35861	Roger R. Finkel	31204		
Donald J. Bird	25323	Timothy J. Klima	34852	Jay M. Wiskestein	21082		
Peter W. Gowdey	25872	David A. Jakopin	32995	Anita M. Kirkpatrick	32617		

1. INVENTOR'S SIGNATURE: Satoshi Hada Date Nov. 22, 1999
Inventor's Name (typed) Satoshi Hada First Middle Initial Last Japan Country of Citizenship
Residence (City) Kariya-shi, Aichi-ken (State/Foreign Country) Japan
Post Office Address (Include Zip Code) c/o DENSO CORPORATION, 1-1, Showa-cho, Kariya-city, Aichi-pref. 448-0029 Japan

2. INVENTOR'S SIGNATURE: Eiichi Kurokawa Date Nov. 22, 1999
Inventor's Name (typed) Eiichi Kurokawa First Middle Initial Last Japan Country of Citizenship
Residence (City) Okazaki-shi, Aichi-ken (State/Foreign Country) Japan
Post Office Address (Include Zip Code) c/o DENSO CORPORATION, 1-1, Showa-cho, Kariya-city, Aichi-pref. 448-0029 Japan

3. INVENTOR'S SIGNATURE: Tomoo Kawase Date Nov. 22, 1999
Inventor's Name (typed) Tomoo Kawase First Middle Initial Last Japan Country of Citizenship
Residence (City) Nagoya (State/Foreign Country) Japan
Post Office Address (Include Zip Code) c/o DENSO CORPORATION, 1-1, Showa-cho, Kariya-city, Aichi-pref. 448-0029 Japan

(FOR ADDITIONAL INVENTORS, check box [X] and attach sheet (PAT-116.2) for same information for each re signature, name, date, citizenship, residence and address.)

DECLARATION AND POWER OF ATTORNEY

(continued)

ADDITIONAL INVENTORS:

Page 2

4. INVENTOR'S SIGNATURE: Toshiyuki Suzuki Date Nov. 22. 1999
 Inventor's Name (typed) Toshiyuki Suzuki Japan
 First Middle Initial Family Name Country of Citizenship
 Residence (City) Handa-shi, Aichi-ken (State/Foreign Country) Japan
 Post Office Address (Include Zip Code) c/o DENSO CORPORATION, 1-1, Showa-cho, Kariva-city, Aichi-pref. 448-0029 Japan

5. INVENTOR'S SIGNATURE: Satoshi Masuda Date Nov. 22. 1999
 Inventor's Name (typed) Satoshi Masuda Japan
 First Middle Initial Family Name Country of Citizenship
 Residence (City) Okazaki-shi, Aichi-ken (State/Foreign Country) Japan
 Post Office Address (Include Zip Code) c/o DENSO CORPORATION, 1-1, Showa-cho, Kariva-city, Aichi-pref. 448-0029 Japan

6. INVENTOR'S SIGNATURE: _____ Date _____
 Inventor's Name (typed) _____
 First Middle Initial Family Name Country of Citizenship
 Residence (City) _____ (State/Foreign Country) _____
 Post Office Address (Include Zip Code) _____

7. INVENTOR'S SIGNATURE: _____ Date _____
 Inventor's Name (typed) _____
 First Middle Initial Family Name Country of Citizenship
 Residence (City) _____ (State/Foreign Country) _____
 Post Office Address (Include Zip Code) _____

8. INVENTOR'S SIGNATURE: _____ Date _____
 Inventor's Name (typed) _____
 First Middle Initial Family Name Country of Citizenship
 Residence (City) _____ (State/Foreign Country) _____
 Post Office Address (Include Zip Code) _____

9. INVENTOR'S SIGNATURE: _____ Date _____
 Inventor's Name (typed) _____
 First Middle Initial Family Name Country of Citizenship
 Residence (City) _____ (State/Foreign Country) _____
 Post Office Address (Include Zip Code) _____

10. INVENTOR'S SIGNATURE: _____ Date _____
 Inventor's Name (typed) _____
 First Middle Initial Family Name Country of Citizenship
 Residence (City) _____ (State/Foreign Country) _____
 Post Office Address (Include Zip Code) _____

11. INVENTOR'S SIGNATURE: _____ Date _____
 Inventor's Name (typed) _____
 First Middle Initial Family Name Country of Citizenship
 Residence (City) _____ (State/Foreign Country) _____
 Post Office Address (Include Zip Code) _____

FOR ADDITIONAL INVENTORS, check box ☐ and attach sheet with same information and signature and date for each.